



SOLBERG

COMPACT "T" STYLE VACUUM FILTERS "CT Series" 2" - 6" FPT

- Compact Design
- Multi-Stage Filtration
- Quick Change Out
- Vacuum Tested



BENEFITS

- ♦ Compact design for space restrictions; **Minimal** service area needed
- ♦ **Integrated Inlet Baffle**
- ♦ Inlet is above the element to **Extend** element life and maintenance intervals
- ♦ "T" style design **Minimizes** piping requirements
- ♦ "Drop-Down" housing for easy servicing and containment of particles
- ♦ Cast aluminum head **Resists** corrosion
- ♦ Pressure differential ports standard for monitoring
- ♦ Casting has 4 unthreaded tap holes for mounting bracket
- ♦ **Vacuum level:** Typically 1×10^{-3} mmHg (1.3×10^{-3} mbar)
- ♦ Swing Bolts on 5" & 6" sizes for additional strength

OPTIONS (Inquires Encouraged)

- ♦ Various media alternatives
- ♦ **See Through Bottom for Visual Inspection Now available for 3" and 4" housings!**
- ♦ Swing Bolts for 2" - 4" Sizes




CT-851/850
2" & 2 1/2" FPT



CT-235P/234P
3" & 4" FPT



CT-275P/274P
5" & 6" FPT

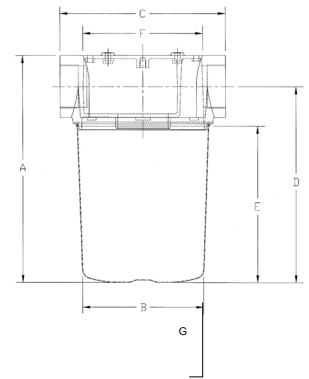

Dimension tolerance $\pm 1/4"$

I = Industrial Duty S = Severe Duty E = Extreme Duty

	with Polyester Element	with Paper Element	FPT Inlet & Outlet	DIMENSIONS - inches					Rated Flow SCFM		Approx. Wt. lbs
				A	B	C	D	E	Nominal Rating	Element Rating	
I	CT-851-200C	CT-850-200C	2"	13	10 7/8	9	9	18	175	290	16
I	CT-851-250C	CT-850-250C	2-1/2"	13	10 7/8	9	9	18	210	290	15
I	CT-235P-300C	CT-234P-300C	3"	18 7/8	16 1/8	13 1/2	13	25	300	570	30
I	CT-235P-400C	CT-234P-400C	4"	18 7/8	16 1/8	13 1/2	13	25	520	570	26
S	CT-275P-500C	CT-274P-500C	5"	18 1/4	14 3/8	19	9 7/8	20	800	1100	50
I	CT-275P-600C	CT-274P-600C	6"	18 1/4	14 3/8	19	9 7/8	20	1100	1100	45

1151 Ardmore Ave. • Itasca, IL 60143 USA
Tel: 630/773 1363 • Fax: 630/773 2643

Solberg – Discover the Possibilities

E-mail: sales@solbergmfg.com • Web Site: www.solbergmfg.com