

C-8520

Fulflo® TruBind™ 700 Cartridges

Effective and Economical Hydrocarbon Removal with Enhanced Polymeric Absorbent Cartridges

Parker Hannifin's Fulflo® TruBind™ absorbent cartridges utilize a modified polymeric absorbent that economically and effectively reduces trace hydrocarbon contamination in aqueous fluids. The enhanced polymer, configured in a radial-flow-design cartridge, provides maximum utilization of available surface area. This product can be used alone or as an enhancement to other systems. Whether process fluid reclamation or meeting disposal requirements is the goal, TruBind™ can solve many demanding hydrocarbon contaminated aqueous fluid problems.

Benefits

- Increases machine tool life when installed at point-of-use
- Increases working life of valuable process fluids
- Reduces hydrocarbon levels to meet EPA discharge regulations
- Absorbed hydrocarbon is chemically bound by polymer and is not leachable
- Absorbent polymer is enhanced to maximize utilization of surface area
- Radial flow design of cartridge allows maximum flow with minimal pressure drop
- High integrity construction withstands harsh process environment
- Retrofits Parker P, FP, FPM vessel series
- TruBind™ cartridges are completely incinerable



Applications

- Water Soluble Machine Tool Coolants
- Industrial Discharge Water
- Produced Water Disposal
- Pre R.O.
- Aerosol Mists
- Injection Molding Cooling Water
- Car & Truck Wash Water
- Gas & Oil Facility Wastewater
- Floor Scrubbing Waste Water Polishing
- Leisure/Commercial Shipping (Truck stops, airports, auto service stations)
- Bilge Water
- Alkaline Parts Washing
- E-Coat Paint
- Tanker Ballast Water
- Plating Solutions
- Pre Carbon Bed Membrane
- Compressor Condensate
- Post Oil/Water Separator
- Surface Water Runoff



ENGINEERING **YOUR** SUCCESS.

Fulflo® TruBind™ 700 Cartridges

Specifications

Materials of Construction:

Absorbent: Laminated Proprietary Polymer
 Support Construction: 100% polyolefin
 Seal Material: Buna-N gasket

Cartridge Dimensions (nominal)

Length: 18 in (457 mm)
 Outside Diameter: 6-1/4 in (159 mm)
 Inside Diameter: 2-5/8 in (67 mm) with separate support core

Maximum Recommended Operating Conditions:

Temperature:
 150°F (65°C) @ 20 psid (1.4 bar);
 180°F (82°C) @ 10 psid (0.7 bar)
 Pressure:
 60 psid (4.1 bar) @ 75°F (24°C)
 Flow Rate: 5 gpm per cartridge
 Changeout Pressure Drop (net):
 10 psi (0.7 bar)
 Flow Factor:
 0.3 psid per 1 gpm at 1 cks viscosity per cartridge
 pH range: 2 -12

Recommended Vessels:

Parker Fulflo "P", "FP", "FPM" Series

BioSafety:

The TruBind™ cartridge is classified as non-hazardous and incinerable. Disposal must be dictated by local regulations pertaining to the absorbed contaminant

Technology

Unlike competitive technologies in which hydrocarbons are removed through surface adsorption onto the medium, TruBind cartridges utilize a proprietary modified polymer that both absorbs and chemically binds the hydrocarbon molecules into its interior matrices. The affinity of the polymeric absorbent for hydrocarbon contaminant is so great that accelerated testing by the Toxic Characteristics Leachate Procedure (TCLP) indicated the effluent hydrocarbon level in water to be below current and proposed EPA limits. The modified polymer was formulated to control the speed of hydrocarbon absorption by eliminating the potential for skin formation at the polymer/hydrocarbon interface. Consequently this polymer, when incorporated into a radial-flow-design cartridge, insures maximum utilization of surface area. The nature of the polymer makes it an effective absorbent for free, emulsified and dissolved oils, synthetic lubricants, grease and a multitude of organic solvents.

Performance

TruBind™ absorbent cartridge efficiency depends upon the residence time of the fluid within the cartridge, which is a function of the volumetric flow rate.


- Hydrocarbon Removal Efficiency:** At an equivalent flow rate of 5 gpm per cartridge the TruBind™ cartridge typically reduces trace hydrocarbon contaminant in excess of 95% in single pass mode. This efficiency level can be maintained only to a net differential pressure of 10 psi. Series or multipass filtration can virtually eliminate hydrocarbon contamination.
- Hydrocarbon Absorbent Capacity:** The TruBind™ cartridge medium has the potential to remove up to 1200 grams (approximately one quart) of low density hydrocarbon contaminant. On this basis, the table below provides expected life data in hours or gallons at several trace contaminant levels based on a 5 gpm flow rate per cartridge. Absorbent capacity will decrease as density of hydrocarbon increases.
- Flow Rate Capability:** A maximum flow rate of 5 gpm per cartridge is recommended for the most effective removal of trace hydrocarbon contaminant.

Hydrocarbon Concentration (ppm)	Concentration (% by Weight)	Hydrocarbon Removal per Minute (grams)	Estimated Life in Hours	Gallons Fluid Treated	Estimated Cost per Gallon of Treated Fluid
10	.001	0.189	111.39	31746	\$.003
100	.01	1.795	11.14	3175	\$.030
1,000	.1	17.954	1.11	317.5	\$.295

TruBind™ 700 Series is coreless and requires a support core prior to cartridge installation in vessel. The polyethylene core gives the cartridge sufficient strength and precludes cartridge collapse at recommended operating conditions. Support core is a reusable part and does not need to be replaced. Part Number: 4452-5120



Ordering Information

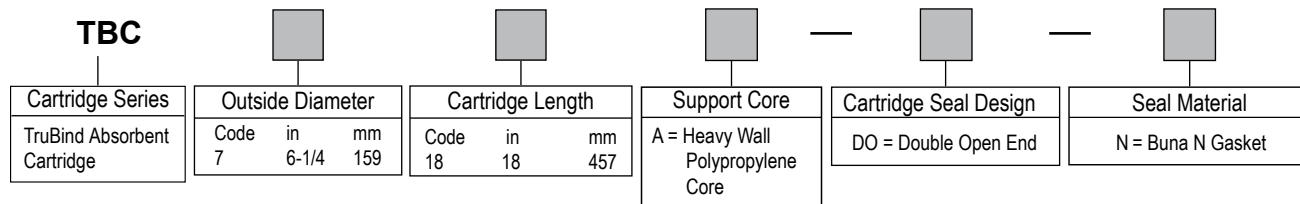

Specifications are subject to change without notification.

© 2007 Parker Hannifin
 Process Advanced Filtration Inc.
 All Rights Reserved
 SPEC-C8520-Rev. A 01/08



ENGINEERING YOUR SUCCESS.